




SPECIALTY VALVES / FITTINGS

2600S / 2600T PRESSURE REDUCING VALVES


A.Y. McDonald Pressure Reducing Valves (PRV's) are designed for installation on potable water lines to reduce incoming water pressure in order to protect plumbing system components. Model 2600 PRV's are suitable for water supply pressures up to 300 psi and can be adjusted from 25 - 75 psi (factory set at 50 psi). This model also has a standard bypass feature that permits flow of water back through the valve and into the main when pressure from thermal expansion exceeds the main supply pressure. Model 2600 PRV's are fully serviceable without removing the valve from the line.

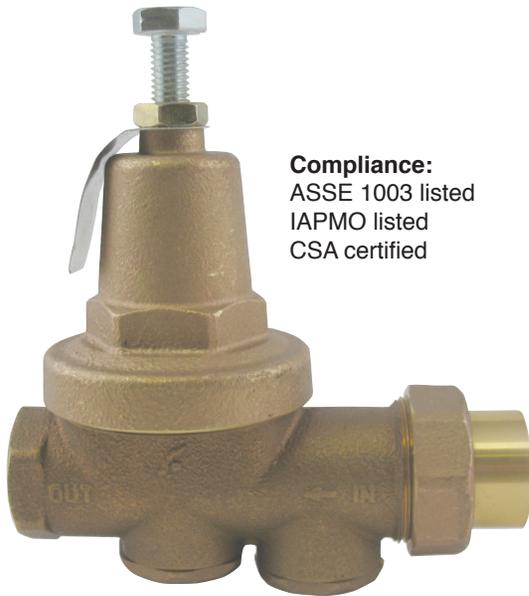


Compliance:
 ASSE 1003 listed
 IAPMO listed
 CSA certified

2600T: FIP Union Inlet x FIP Outlet
2600S: Solder Union Inlet x FIP Outlet
Sizes: 1/2" - 1"

Capacity:

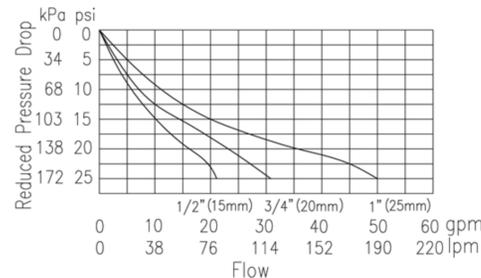

- Maximum working water pressure 300 psi
- Maximum working water temperature 160F
- Reduced pressure range 25 psi - 75 psi
- Factory preset 50 psi
- Built-in thermal expansion by-pass feature
- Replaceable stainless steel seat and strainer
- High temperature resistant diaphragm
- Stainless steel adjustment bolt and lock nut
- Cast bronze body (ASTM 83600)
- Serviceable in-line

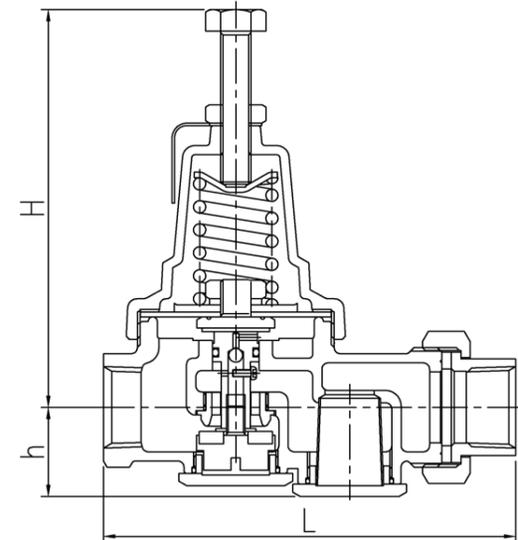

~ DIMENSIONS ~			
SIZE	L	H	h
1/2"	5.28"	5.12"	1.14"
3/4"	5.28"	5.12"	1.14"
1"	6.26"	5.71"	1.54"

Specification:

Pressure Reducing Valve shall be installed in the water service line where main supply pressure exceeds 80 psi. The valve shall consist of bronze body and be capable of incoming pressure up to 300 psi. The valve shall be serviceable in line and also function as a bypass valve to protect the plumbing system from damage due to thermal expansion. Approved valve shall be certified to ASSE 1003, IAPMO, and CSA B356. Valve shall be an A.Y. McDonald 2600.